

BMW E60,E63,E90 INTERFACE INSTALL MANUAL



Full Dashboard View of Vehicle



Close up of in-dash monitor.



STEP 1: Protect dashboard first by laying tape on dashboard trim.



STEP 2: Using a small screwdriver unscrew 2 small screws holding upper trim panel.



STEP 3: Pull down and away from dash.



STEP 4: Pulling downwards and slightly angling the unit will allow the unit room to come out of dash.



STEP 5: Disconnect both cables behind the display unit.



STEP 6: Connect LVDS Cable to LVDS IN side of the Nav Interface box.




STEP 7: Connect Supplied LVDS Cable to LVDS OUT side of the Nav Interface.



STEP 8: Make sure to see if these connections are secure.



STEP 9: Connect LVDS Cable to display part of the in-dash unit.

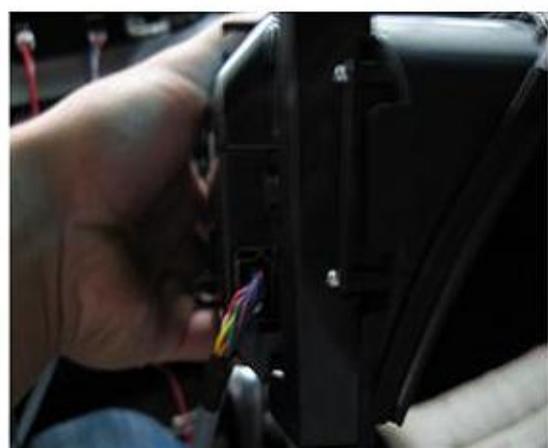

STEP 10: Make sure that this connection is secure.



STEP 11: Connect the power cable to the Nav Interface Unit.



STEP 12: Run the wire for the remote eye so that the eye can line up with the remote signal.



STEP 13: Secure the remote eye in a location that it will receive the remote control signal.



STEP 14: Test unit to see if factory display shows on the screen.



STEP 15: Select between the different sources to see if unit shows different inputs.

Before you completely re-install the unit into the dash, it is a good time to adjust the menu display settings.



Note: When connecting this unit in a BMW 3 Series Car, please be aware that it will be necessary to mount the Nav Interface Unit under the driver's side dashboard using the extension cable supplied.

